



GB04/01703



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 28 MAY 2004

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

11 May 2004

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)



25APR03 E802569-1/000129  
P01/7700 0:00-0309381.2

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE

25 APR 2003

03009381.2 NEWPORT

25 APR 2003

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

2. Patent application number

(The Patent Office will fill in this part)

0309381.2

3. Full name, address and postcode of the or of each applicant (underline all surnames)

SMITHS GROUP PLC  
765 FINCHLEY ROAD  
LONDON  
NW11 8DS

Patents ADP number (if you know it)

8032310001 ✓

If the applicant is a corporate body, give the country/state of its incorporation

GB

4. Title of the invention

VACUUM CLEANER APPARATUS AND HOSES

5. Name of your agent (if you have one)

J. M. FLINT

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

765 FINCHLEY ROAD  
LONDON  
NW11 8DS

Patents ADP number (if you know it)

1063304001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 6

Claim(s)

Abstract

Drawing(s) 2 2 2 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

J. M. Flint

Date 24 APRIL 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

J. M. FLINT 020 8457 8220

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

## VACUUM CLEANER APPARATUS AND HOSES

This invention relates to vacuum cleaner apparatus and hoses.

Vacuum cleaners may be of the upright kind where cleaning suction is applied by means of a pump having an inlet directly below the machine. Cylinder vacuum cleaners, by contrast, have an inlet connected to one end of a hose, the other end of which connects to a suction cleaning head. Upright cleaners also usually have provision by which an accessory hose can be connected to the inlet so that a hand-held suction head can be used to clean regions that would otherwise be inaccessible to the machine. The hoses used with vacuum cleaners tend to be bulky so that they have to be stored separately from the cleaner. An alternative hose available on some vacuum cleaners as sold by the major manufacturers has stretch characteristics with a natural, retracted length (when not in use) less than its extended length (when in use). The extended length may be about five times the retracted length. Although this hose has the advantage of being much easier to store than conventional hoses, its resilience may make it more difficult to use in some situations, especially with cylinder vacuum cleaners, which are lighter than upright cleaners.

WO 03/024294 describes a vacuum cleaner hose that can be retracted in length by the application of a vacuum and that can be retained in its retracted length on the vacuum cleaner or in a separate outer container. WO 99/35954 describes a vacuum cleaner where the hose can be retracted into a flexible outer sleeve connected with the vacuum cleaner. EP 1011408 describes a vacuum cleaner hose that can be retracted into the rigid cleaning wand and held by a fitting on the wand that engages grooves on the outside of the hose. US 4050113

describes a vacuum cleaner where the hose is retracted into a tube fixed to the outside of the cleaner. EP 388676 describes an upright vacuum cleaner where a part of the length of an accessory hose is stored in the cleaning wand clipped onto the cleaner. WO 86/07247 describes another vacuum cleaner hose that can be stored within a cleaning wand.

It is an object of the present invention to provide an alternative hose and vacuum cleaner apparatus including such a hose.

According to one aspect of the present invention there is provided vacuum cleaner apparatus including a vacuum cleaner with a suction inlet, a substantially rigid tubular cleaning wand, a flexible hose that can be extended and retracted in length, the hose being connected at one end with the suction inlet, the other end of the hose extending through the rear end of the wand and being secured at its forward end towards the forward end of the wand, and a flexible outer member extending externally along a rear part of the hose and that is adapted to be secured between the rear end of the wand and the vacuum cleaner so as to retain the hose in a retracted state within the wand and the outer member.

The wand is preferably telescopic in length. The hose preferably has a natural extended length and is retractable to a shorter length by the application of suction to the hose while its forward end is occluded.

According to another aspect of the present invention there is provided a hose assembly for vacuum cleaner apparatus according to the above one aspect of the present invention.

According to a further aspect of the present invention there is provided a method of operating vacuum cleaner apparatus including the steps of applying suction to one end of a flexible hose, using a cleaning head attached to a substantially rigid wand at the opposite end of the hose to clean, subsequently retracting a forward part of the length of the hose into the wand and a rear part of the length of the hose into a flexible outer member, securing the outer member between the rear end of the wand and the vacuum cleaner so that the hose is retained in a retracted length within the wand and outer member .

The hose may be retracted by occluding flow of air through the hose at its forward end after cleaning, allowing pressure in the hose to reduce sufficiently to retract the hose in length into the wand and into the flexible outer member.

Vacuum cleaner apparatus including a hose according to the present invention, will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a side elevation view of the apparatus during use; and

Figure 2 is a side elevation view of the apparatus after use, with the hose and wand stowed.

The apparatus comprises a cylinder vacuum cleaner 1 and a hose assembly 2 connected at the suction inlet 3 of the cleaner.

The vacuum cleaner 1 may be entirely conventional.

The hose assembly 2 includes a suction cleaning head 20 at its forward end connected to the forward end 22 of a rigid cleaning wand 21. The wand 21 is tubular and telescopic, with three sections 23, 24 and 25 that can be extended in length and locked together for cleaning and that can be retracted within one another for storage. At its forward end 22, the wand 21 has a valve or occluder 26, such as of the kind described in WO 03/024294. Towards its rear end 27, on the rear section 25, the wand 21 has a handle 28.

The hose assembly 2 also includes a flexible hose 30 that is extensible and retractable in length. In particular, the hose 30 has a natural extended length and can be retracted in length by applying axial pressure to it against its resilience. Typically, the ratio of the retracted to the extended length is between about 1:3 and 1:5. Preferably the hose 30 is of the kind described in WO 03/024294 having a helical support wire and a flexible outer sleeve that folds outwardly between turns of the wire when the hose is retracted in length. The forward end 31 of the hose 30 is connected with the forward end 22 of the wand 21 and opens into the cleaning head 20. The hose 30 extends rearwardly within the wand 21 and out of its rear end 27. The rear end 32 of the hose 30 has a coupling 33 connected with the suction inlet 3 on the vacuum cleaner 1.

The rear end 32 of the hose 30 extends within a short flexible outer member in the form of a sleeve 40 attached at one end with the coupling 33 on the hose. The sleeve 40 preferably has a fixed length or is only slightly extensible and may have a smooth surface or,

as illustrated, be corrugated for improved flexibility. The sleeve 40 has a coupling 41 at its forward end 42.

As shown in Figure 1, the length of the hose 30 is sufficient to provide a flexible section between the rear end 27 of the cleaning wand 21 and the vacuum cleaner 1 to enable the wand to be manoeuvred freely and to provide a useful cleaning radius around the vacuum cleaner. The relatively short length and the flexible nature of the sleeve 40 ensures that this does not substantially impede movement of the wand 21.

When the user has finished cleaning and wishes to stow the hose 30 he closes the occluder 26 while the suction power continues to be created by the vacuum cleaner 1. This produces a reduced pressure within the hose 30 causing an axial pressure to be applied and thereby causing it to retract in length. As the hose 30 retracts, its forward part moves into the wand 21 and its rear part moves into the sleeve 40. This causes the rear end 27 of the wand 21 to come closer to the forward end 42 of the sleeve 40 until the coupling 41 at the forward end of the sleeve can be attached to the rear end of the wand. The sleeve 40 is, therefore, now secured between the rear end of the wand and the vacuum cleaner. When this is done, the flexible hose 30 is enclosed along its entire length within the wand 21 and the sleeve 40. The wand 21 can now be shortened by telescoping the sections 23 to 25 with one another and the wand can be secured to the casing of the vacuum cleaner 1 by engaging a fixing 50 on the wand with a fixing 51 on the vacuum cleaner.

Preferably, the wand 21 extends substantially parallel to the length of the vacuum cleaner 1 and the suction inlet 3 is located towards one end of the cleaner so as to minimize



the length of sleeve 40 needed to connect the wand with the suction inlet. The vacuum cleaner 1 can now be turned off, allowing pressure in the hose 30 to return to atmosphere. The hose 30 is held in its retracted state because it is retained by the wand 21 and the sleeve 40. When the vacuum cleaner is to be used again, the user simply unfastens the sleeve 40 from the rear end 27 of the wand 21 and allows the hose 30 to extend. It may be necessary to pull the wand 21 slightly away from the vacuum cleaner 1 to extend the hose 30 fully.

The invention enables a vacuum cleaner hose to be stowed in a very compact configuration, making storage of the apparatus much easier.

The hose assembly could be removed from the vacuum cleaner after use by simply unfastening the coupling with the suction inlet. This enables the hose, within the wand and sleeve to be stored separately of the cleaner, if more convenient.

Instead of its rear end being fixed at the cleaner, the forward end of the sleeve could be fixed with the rear end of the wand and the rear end could have a removable coupling connectible with the cleaner.

The hose assembly is not confined to use with cylinder vacuum cleaners but could be used as an accessory hose assembly with upright cleaners, or with central vacuum cleaner systems. The hose need not be retracted by suction power, it could instead just be pushed into the wand and sleeve manually. The hose could have a normal, retracted state so that a slight pulling force has to be exerted in order to extend it and so that its natural resilience pulls it into the wand and outer member after use.

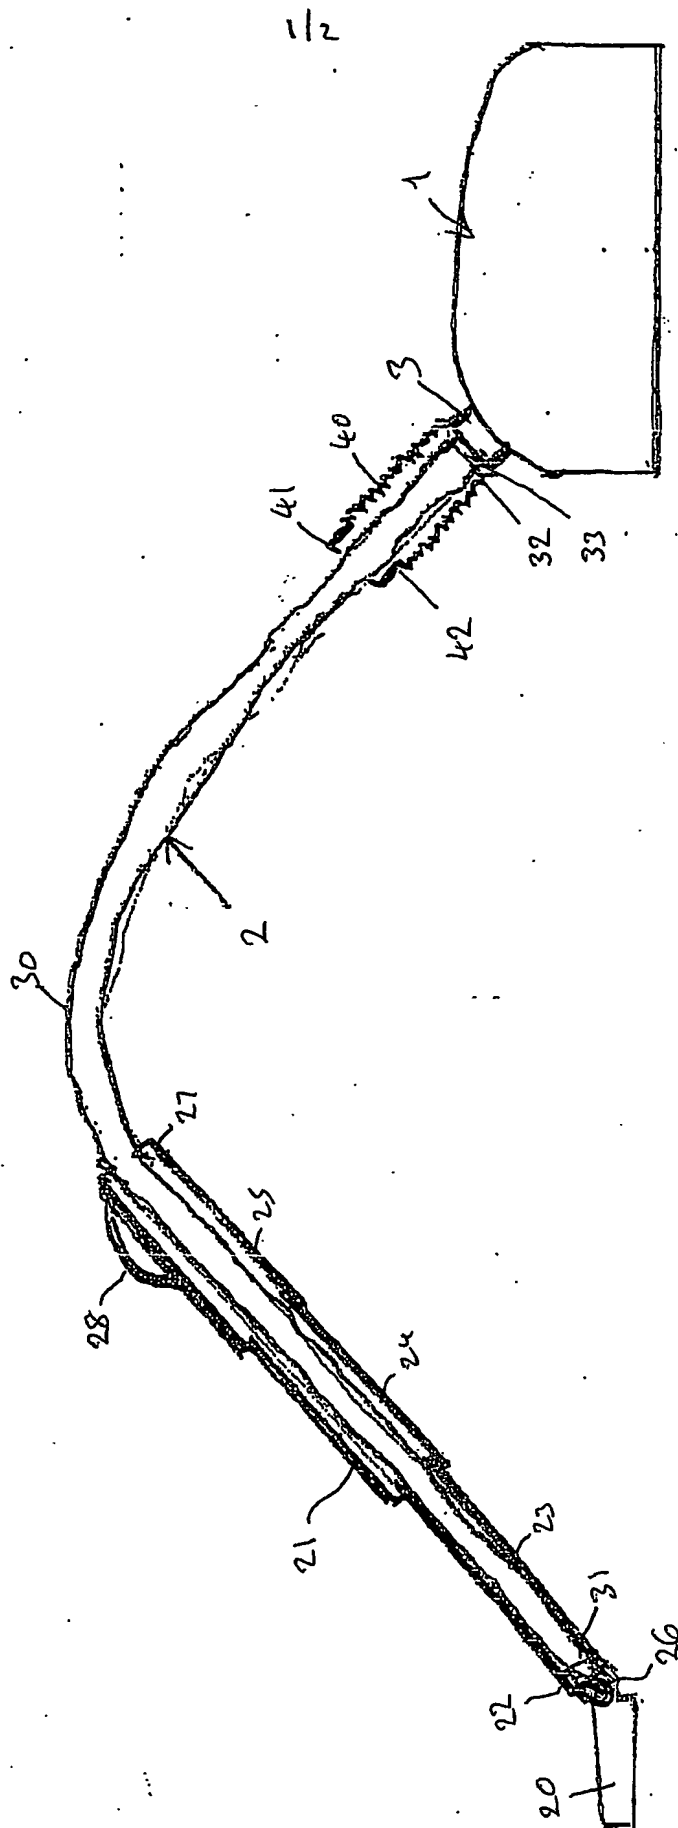


FIG. 1

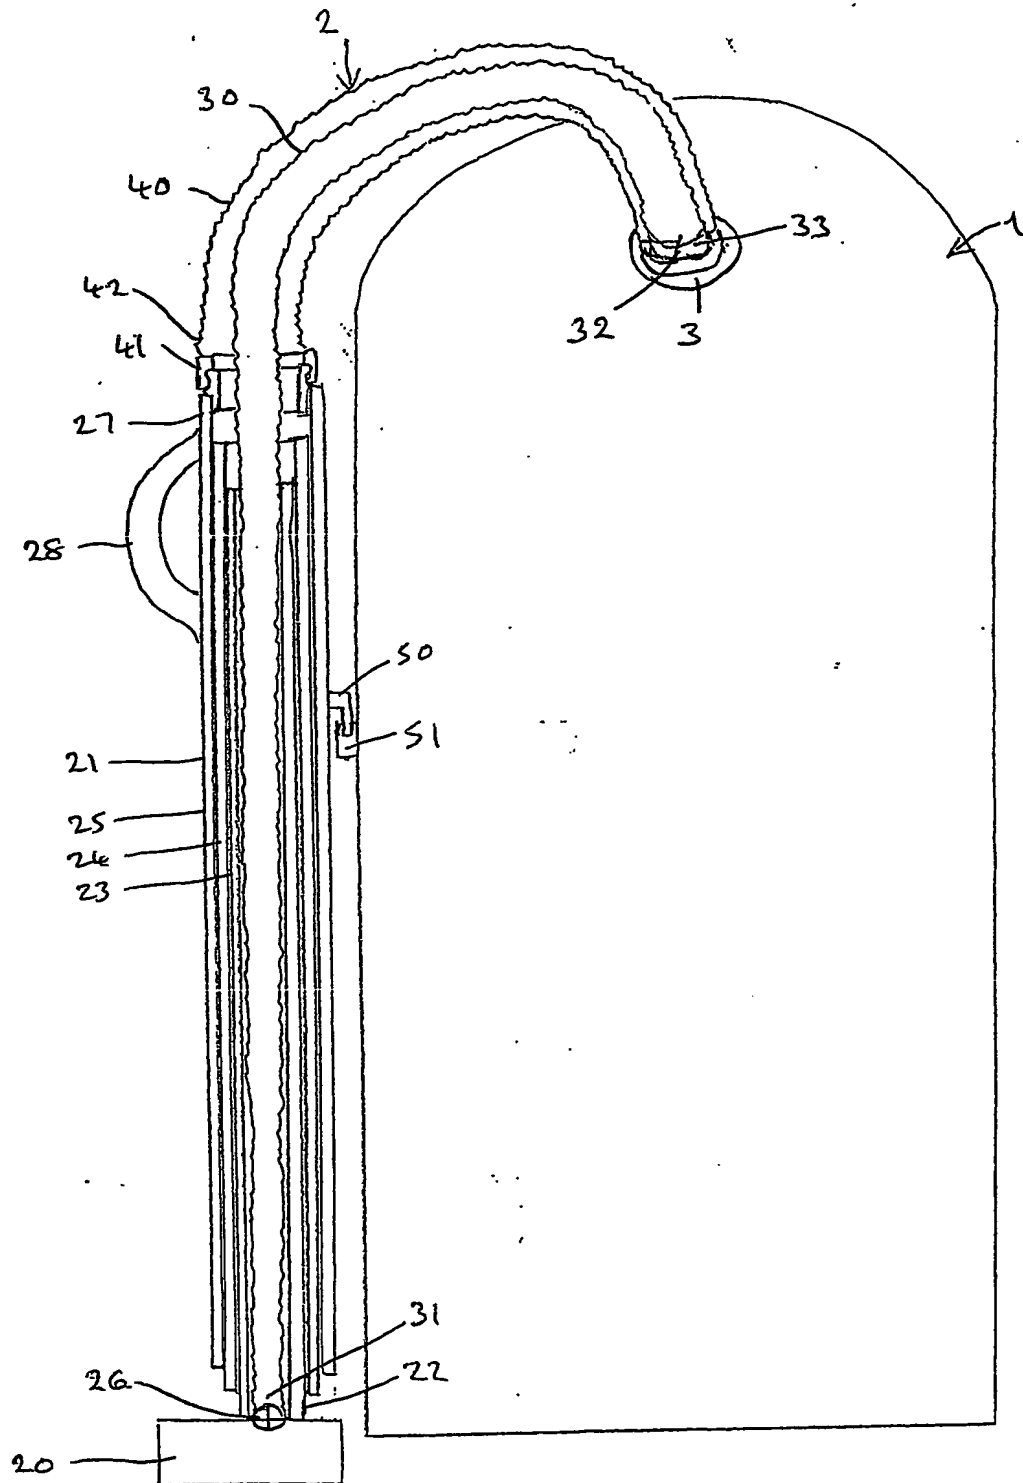


FIG. 2